


RX-4 Ultra- Hybrid 12" EXT - ZTR


| CAM | LETOFF | BRACE HEIGHT | AXLE TO AXLE | DRAW LENGTH | MODULE POSITION | BASE CAM | STRING | CONTROL CABLE | BUSS CABLE | CAM FAMILY |
|--------|--------|-----------------|-----------------|----------------|--------------------|-------------|--------|------------------|---------------|---------------|
| ZTR #2 | 80% | 6 7/8 | 34 1/8 | 27 | A | 2 | 57.25 | 37.25 | 35.63 | ZTR |
| | 80% | 6 7/8 | 34 1/8 | 27.5 | B | 2 | 57.25 | 37.25 | 35.63 | ZTR |
| | 80% | 6 7/8 | 34 1/8 | 28 | C | 2 | 57.25 | 37.25 | 35.63 | ZTR |
| | 80% | 6 7/8 | 34 1/8 | 28.5 | D | 2 | 57.25 | 37.25 | 35.63 | ZTR |
| | 80% | 6 7/8 | 34 1/8 | 29 | *E | 2 | 57.25 | 37.25 | 35.63 | ZTR |
| | 80% | 6 7/8 | 34 1/8 | 29.5 | F | 2 | 57.25 | 37.25 | 35.63 | ZTR |
| | 80% | 6 7/8 | 34 1/8 | 30 | G | 2 | 57.25 | 37.25 | 35.63 | ZTR |

| CAM | LETOFF | BRACE HEIGHT | AXLE TO AXLE | DRAW LENGTH | MODULE POSITION | BASE CAM | STRING | CONTROL CABLE | BUSS CABLE | CAM FAMILY |
|--------|--------|-----------------|-----------------|----------------|--------------------|-------------|--------|------------------|---------------|---------------|
| ZTR #3 | 80% | 6 1/8 | 34 | 30 | A | 3 | 60.00 | 37.35 | 35.60 | ZTR |
| | 80% | 6 1/8 | 34 | 30.5 | B | 3 | 60.00 | 37.35 | 35.60 | ZTR |
| | 80% | 6 1/8 | 34 | 31 | C | 3 | 60.00 | 37.35 | 35.60 | ZTR |
| | 80% | 6 1/8 | 34 | 31.5 | D | 3 | 60.00 | 37.35 | 35.60 | ZTR |
| | 80% | 6 1/8 | 34 | 32 | *E | 3 | 60.00 | 37.35 | 35.60 | ZTR |



*=Shipped Module Position

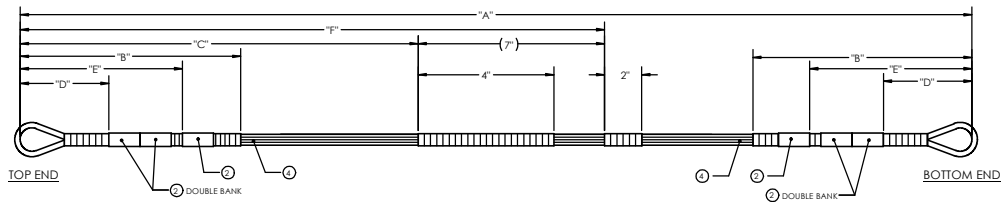

| STRING | | | | | | | | |
|----------|-------------|--------------------|--------------------|--------------------------|-----------------------|-----------------------|------------------------|-----------------------------|
| CAM SIZE | STRING NAME | "A" OVERALL LENGTH | "B" SERVING LENGTH | "C" START CENTER SERVING | "D" TOP & BOT BANK #1 | "E" TOP & BOT BANK #2 | "F" START STEALTH SHOT | STRING MATERIAL INFORMATION |
| ZTR #2 | AU6 | 57.25" | 17 3/4" | 26 3/4" | 14.75" | 16.75" | 33 3/4" | STRING #1 |
| ZTR #3 | AU6 | 60" | 19 3/4" | 28 1/8" | 16.75" | 18.75" | 35 1/8" | |

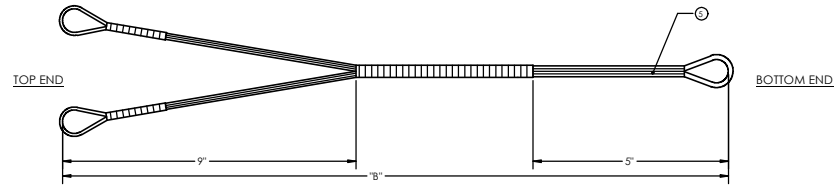

| HARD ROLLER YOKE BUSS CABLE | | | |
|-----------------------------|--------------------|-----------------------|---------------------------------|
| CAM SIZE | "A" OVERALL LENGTH | "B" MAIN CABLE LENGTH | BUSS CABLE MATERIAL INFORMATION |
| ZTR #2 | 35.63" | 27.18" | BUSS CABLE #1 |
| ZTR #3 | 35.63" | 27.18" | |

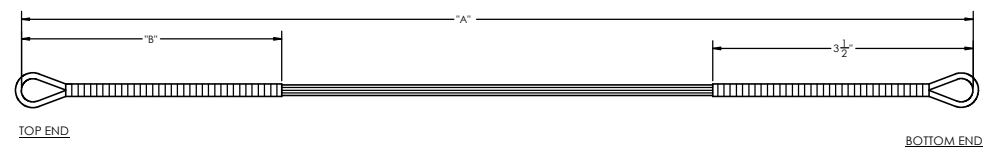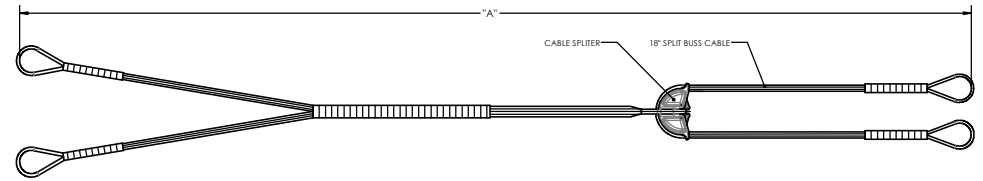

| ROLLER CONTROL BUSS CABLE | | | |
|---------------------------|--------------------|------------------------|------------------------------------|
| CAM SIZE | "A" OVERALL LENGTH | "B" TOP SERVING LENGTH | CONTROL CABLE MATERIAL INFORMATION |
| ZTR #2 | 37.25" | 20" | CONTROL CABLE #1 |
| ZTR #3 | 37.35" | 20" | |

- NOTES:
1. LOCATION OF NOCK BANK
 3. NOCK BANKS SHOULD BE COVERED IN HEAT SHRINK TUBING.
 - LOCATION OF HOLE SHOT.
 - LOCATION OF CABLE LEECH

RX-4 ULTRA

After Market String Warning

Warning: Never use aftermarket strings or cables on your bow. Aftermarket strings and cables may not be suitable for replacement on your Hoyt bow. Hoyt cannot guarantee that the materials or the manufacturing methods used by aftermarket string and cable manufacturers will be suitable for use on your Hoyt bow. Failure to heed this warning could result in serious injury or death to yourself or bystanders. Only Genuine Hoyt or Fuse branded strings and cables should be used on your Hoyt bow.

Warning: Never move, remove, or add additional string weights to your Hoyt bow's string or cables. String weights are specifically engineered for weight and location to ensure correct operation of your bow. Alterations to string and cable speed weights could cause your bow to break or malfunction and cause serious injury or death.